
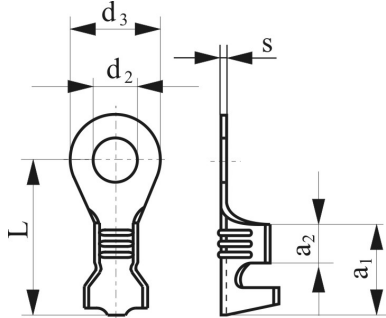

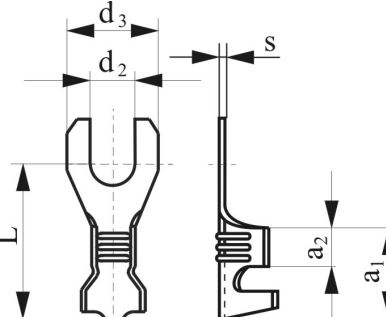




Cable lug viing type DIN 46225 A								
Material: CuZn								
								
Mark		Cross section of conductor mm ²	L mm	a ₁ mm	a ₂ mm	d ₂ mm	d ₃ mm	s mm
brass bare Ms	tin-plated							
2210	2230	0.5-1	18.3	9	4.5	3.2	8	0.6
2251	2261					3.7		
2211	2231					4.3		
2212	2232					5.3	9.5	
2214	2234	1.5-2.5	18.3	9	4.5	3.2	8	0.6
2215	2235					4.3		
2216	2236					5.3	9.5	
2217	2237					6.5	9.5	

Cable lug viing type DIN 46225 B								
Material: CuZn								
								
Mark		Cross section of conductor mm ²	L mm	a ₁ mm	a ₂ mm	d ₂ mm	d ₃ mm	s mm
brass bare Ms	tin-plated							
2222	2242	0.5-1	18.3	9	4.5	3.2	8	0.6
2224	2244					4.3		
2226	2246	1.5-2.5	18.3	9	4.5	3.2	8	0.6
2227	2247					4.3		
2228	2248					17.5	5.3	
2200	2201	0.75-1.5	10.5	5.8	2.8	3.2	7	0.6 (0.5)
2202	2203					3.7		
2204	2205					4.3		

Cable lug viing type

Material: CuZn



Mark		Cross section of conductor mm ²	L mm	a mm	b mm	d ₂ mm	d ₃ mm	s mm
brass bare Ms	tin-plated							
2411	2401	0.5-1	11	4.6	3.2	3.2	6	0.6
2412	2402					3.7		