




Solderless terminals-Ringtype DIN 46237 A
Material: E-Cu
Protection: tin-plated
Insulations: Polyamide


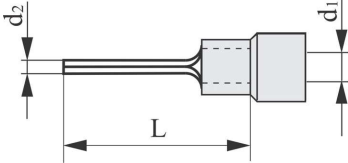




Mark	Cross section of conductor mm ²	Measure mm-mm ²	d ₁ mm	d ₂ mm	L mm	colour insulations	Packaging pieces
2050	0.5 - 1	2.5 - 1	1.6	2.7	11	red	500
2051		3 - 1	1.6	3.2	11		
2052		4 - 1	1.6	4.3	12		
2053		5-1	1.6	5.3	12		
2055	1.5 - 2.5	3 - 2.5	2.3	3.2	11	blue	500
2056		4 - 2.5	2.3	4.3	12		
2057		5 - 2.5	2.3	5.3	14		
2058		6 - 2.5	2.3	6.5	16		
2059		8 - 2.5	2.3	8.4	17		
2060	4 - 6	4 - 6	3.6	4.3	14	yellow	500
2061		5 - 6	3.6	5.3	14		
2062		6 - 6	3.6	6.5	16		
2063		8 - 6	3.6	8.4	19		
2064		10 - 6	3.6	10.5	21		


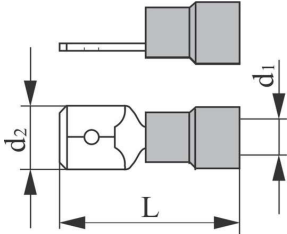
Solderless terminals-SpadetypeDIN 46237 B
Material: E-Cu
Protection: tin-plated
Insulations: Polyamide


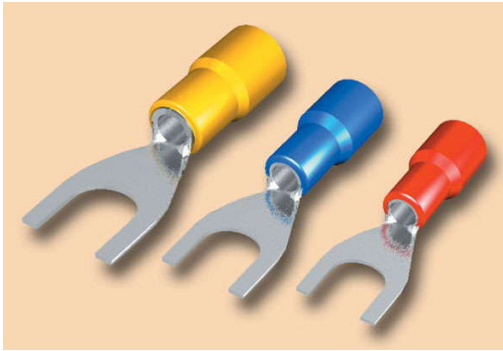


Mark	Cross section of conductor mm ²	Measure mm-mm ²	d ₁ mm	d ₂ mm	L mm	colour insulations	Packaging pieces
2071	0.5 - 1	3 - 1	1.6	3.2	10.5	red	500
2072		4 - 1	1.6	4.3	12.0		
2073		5 - 1	1.6	5.3	13.5		
2074		6 - 1	1.6	6.5	15.5		
2075	1.5 - 2.5	3 - 2.5	2.3	3.2	10.5	blue	500
2076		4 - 2.5	2.3	4.3	11.5		
2077		5 - 2.5	2.3	5.3	14.5		
2078		6 - 2.5	2.3	6.5	16.0		
2079	4 - 6	4 - 6	3.6	4.3	14.0	yellow	500
2080		5 - 6	3.6	5.3	15.0		
2081		6 - 6	3.6	6.5	16.5		
2082		8 - 6	3.6	8.4	19.5		
2083		10 - 6	3.6	10.5	21.0		

Solderless pin terminals DIN 46231 Material: E-Cu Protection: tin-plated Insulations: Polyamide						
						
Mark	Cross section of conductor mm ²	d ₁ mm	d ₂ mm	L mm	colour insulations	Packaging pieces
2301	0.5-1	1.8	1.9	18	red	500
2302	1.5-2.5	2.3	1.9	18	blue	
2303	4-6	3.6	2.7	20	yellow	

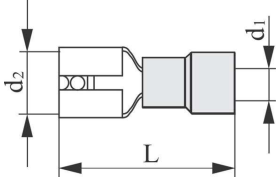Female push on terminals preinsulated DIN 46245 Material: CuZn Protection: tin-plated Insulations: Polyamide						
						
Mark	Cross section of conductor mm ²	d ₁ mm	d ₂ mm	L mm	colour insulations	Packaging pieces
7001	0.5-1	6.3	2.0	22	crvena	100
7002	1.5-2.5	6.3	2.8	22	plava	
7003	4-6	6.3	3.5	23	žuta	500

Male push on terminals preinsulated						
Material: CuZn						
Protection: tin-plated						
Insulations: Polyamide						
						
Mark	Cross section of conductor mm ²	d ₁ mm	d ₂ mm	L mm	colour insulations	Packaging pieces.
7011	0.5-1	6.3	2.0	22	crvena	100 500
7012	1.5-2.5	6.3	2.8	22	plava	
7013	4-6	6.3	3.5	23	žuta	

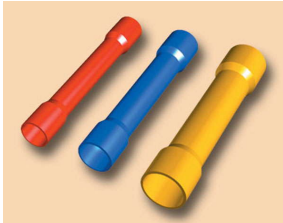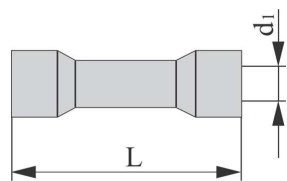
Butt connectors preinsulated					
Material: Cu					
Protection: tin-plated					
Insulations: Polyamide					
					
Mark	Cross section of conductor mm ²	d ₁ mm	L mm	colour insulations	Packaging pieces
7021	0.5-1	1.8	22	crvena	100 500
7022	1.5-2.5	2.5	22	plava	
7023	4-6	3.8	23	žuta	

Pre-insulated wire end sleeves DIN 46228 part 4

Material: Cu

Protection: tin-plated

Insulations: Polyamide



Mark	Cross section of conductor mm ²	d ₁ mm	L ₁ mm	L ₂ mm	Packaging pieces
2501	0.25	0.8	10	6	500
2502	0.5	1.0	14	8	
2503	0.75	1.2	14	8	
2504	1.0	1.4	14	8	
2505	1.5	1.7	16	8	
2506	2.5	2.2	18	10	
25061	4	2.8	18	10	
2507	6	3.6	20	12	
2510	10	4.5	28	18	
2508	16	5.8	28	18	
2562	2x0.5				1000
2563	2x0.75				
2564	2x1.0				
2565	2x1.5				
2566	2x2.5				
2567	2x4.0				
	2x6.0				
	2x10				
	2x16				
2511	25	7.3	30	18	
2512	35	8.3	30	18	
2513	50	10.3	40	25	